



RELIABLE BY DESIGN



Discover the cleaning efficiencies and sanitation benefits on a spectrum of stainless steel finishes.

LEVERAGING STAINLESS FINISHES ON SANITARY EQUIPMENT

For many food producers, the level of finishing on processing equipment may be prescribed by federal, state and local regulatory agencies. In sanitary applications, however, the finish as well as the material must also be designed for easy and reliable cleaning and sanitation. Agencies require sanitary finishes to have a minimum RA (roughness average,) but food processors are seeing the advantages of exceeding regulatory compliance due to the decreased sanitation time and decreased bacteria risk proven with higher-end finishes.

This white paper serves as an educational and informational reference to include:

- Definitions of stainless finishes and measurement designations
- An overview of surface textures of stainless steels
- A comparison guide to stainless steel finishes
- RA comparison data by finish type

For original equipment manufacturers, the level of complexity for stainless steel fabrication of sanitary equipment is significant. Each industry requires experience and controlled processes for quality fabrication. Tooling, process and technique are very important.



Mechanical, chemical and applied processes are used to achieve different finishes. Mechanical polishing involves the removal of material using a grinding process. Typically, grit sizes of 120 and finer classify as mechanical polishing.

Chemical treatments remove the outer layer of corrosion in the material to preserve the integrity of the metal.

Below is a description of textures and finishes featuring both mechanical and chemical methods, commonly used to produce Apache's tank and vessel processing equipment as well as the Mepaco® food processing equipment line.

Stainless Steel Textures & Finishes

Mill Finish A Mill Finish has an unpolished, dull-gray, matte appearance. This finish forms the basis for supply condition for all stainless steel flat products and also forms the basis for additional finishing operations. It is hot or cold rolled with an RA of more than 100 microinches, depending on the gauge of the material. (Gauge refers to cold rolled; plate is hot rolled material.)

2B Mill Finish This is a widely used stainless steel finish, common in industrial, chemical and food applications. It is corrosion-resistant and has a typical RA range of 40 (7 gauge) to 15 (16 gauge) microinches.

No. 3 Finish The No. 3 Finish uses a 120 grit abrasive. It has a semi-polished finish with an RA range of 36 - 58 microinches.


No. 4 Finish This finish uses a 150 grit abrasive, and shows a polished brushed surface. The RA range is 29 - 40 microinches.

No. 4/ Dairy For processing industries, the Number 4/Dairy is required to meet the basic 3-A standards. It uses a 180 grit and has an RA range of 18 - 31 microinches.


Bead Blasted Finish The process of bead blasting utilizes bead material such as glass or ceramic beads to produce a non-directional, textured surface with a soft satin appearance and low-reflectivity. The finer the blasting media, the more corrosion resistant the surface performance. The RA values are typically higher than 45, but are dependent on the blasting process and the stainless material.



A profilometer (RA meter) is used to measure the roughness average of peaks and valleys in stainless material.

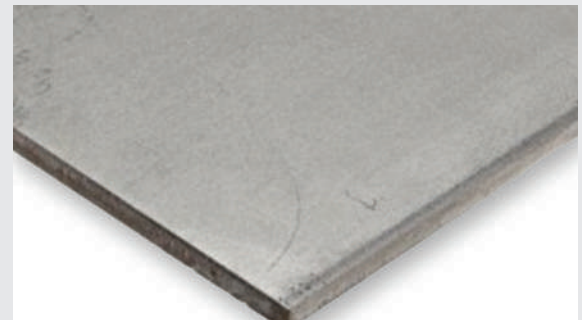

Stainless material with a mill finish has a rough, dull and non-uniform appearance.

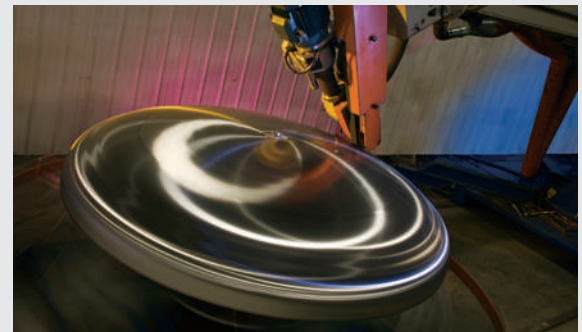


Mechanical polishers use an abrasive material (measured by grit coarseness) to create the finish.



Providing a matte appearance, Apache has experienced results in improved RA smoothness after the pickle passivation, descaling process.

MECHANICAL FINISHES

Mill Finish**Description**

(Mill finish - Plate)
The baseline for comparison,
this is unfinished steel in basic
supply condition.

Applications

Structural

Sanitation Environment


None - not used in
food contact areas

RA

>100 microinches
Depending on material

Caution

Does not meet sanitary,
food contact or processing
finishing requirements

2B Finish**Description**

(2B Finish -Gauge)
Common corrosion resistant,
heat resistant,
smooth, (not brushed) steel

Applications

Material handling,
processing,
direct food contact

Sanitation Environment


Suitable for caustic sanitary
wash down procedures

RA

36 (7 gauge) to 15 (16 gauge)
in microinches

Caution

Note that 2B finishes can have
the same RA as higher end
finishes depending on gauge,
compare economies when
making material decisions
unless otherwise required by
compliance factions

No. 4**Description**

Characterized by short,
polished brushed lines

Applications

Used for food processing and
ancillary equipment in
clean rooms

Sanitation Environment


Suitable for caustic sanitary
wash down procedures

RA

29 to 40 microinches

Caution

Note that a No. 4 finish is not
compliant for 3A standards; a
No. 4/Dairy finish will satisfy
RA requirements for the Dairy/
Cheese manufacturing industry

No. 4/Dairy**Description**

Also characterized by short,
polished brushed lines, the
No.4/Dairy finish uses a
finer grit polish

Applications

Used in clean rooms,
processing equipment,
used in Pharmaceutical
industries and complies to
3A Dairy standards

Sanitation Environment

Suitable for caustic sanitary
wash down procedures

RA

18 - 31 microinches
(3A standards require
32 or less)

Caution

Welds are also required to be
ground to a No. 4/Dairy finish
to meet 3A Dairy standards



APPLIED / CHEMICAL FINISHES

Visit us at www.mepaco.net

Bead Blast



Description

The high pressure delivery of fine glass or ceramic beads (uniform, non-directional, low-reflective surface)

Applications

Used when a uniform finish is desired in structural, material handling or food handling applications

Sanitation Environment

Bead blasting on common 304 and 316 stainless material is suitable for caustic wash down procedures

RA

>45
depending on
blasting process

Caution

Bead blasting is not necessarily a smooth finish, the RA and smoothness depends on the stainless material used, the fineness of the blasting media and the blasting process.

Passivation



Description

A chemical (typically nitric or citrus acid) treatment that produces a formation of a protective passive film on stainless steel

Applications

Most stainless steel material is passivated, polished or treated in some way to prevent corrosion; passivation may also be a federal specification

Sanitation Environment

Passivated stainless material can withstand caustic wash down procedures

RA

RA values have no significant improvement after passivation*


Caution

Chemical passivation is a protective treatment, not a descaling process.

Federal Specification No.

A-967

Pickle Passivation



Description

Also referred to as descaling, pickle passivation removes the scale and leaves a clean, matte finish, free from contamination

Applications

Used in pharmaceutical industries as a federal specification and in food processing industries to reduce food safety risk

Sanitation Environment

Suitable for caustic, aggressive sanitary wash down environments

RA

Depending on material, pickle passivation can result in up to 25% increased smoothness measured in RA*


Caution

Partner with expert finishing specialists who perform the recommended procedures for best results.

Federal Specification No.

A-380

Electropolishing



Description

Surface metal is dissolved, removing all embedded contaminants, creating a smooth, mirror finish

Applications

Used in pharmaceutical industries as a federal specification and in food processing industries to prevent bacterial attachment and reduce food safety risk

Sanitation Environment

Highest grade of passive surface available, can be subjected to long term caustic wash down

RA

Depending on material, electropolishing can result in up to 50% increased smoothness measured in RA*

Caution

Partner with expert finishing specialists who perform the recommended procedures for best results.

Federal Specification No.

B-912



Passivation Passivation is the removal of excess iron or iron compounds from the surface of stainless steel by means of a chemical, typically an acid based solution. Unlike pickle passivation, no metal is removed from the surface during the process. The process has little affect on the RA values of the stainless material being passivated.

Pickle Passivation is the immersion of the metal in a pickling bath, or coating the material with pickling solution such as nitric-hydrofluoric acid. The process removes both metallic contamination and heat-treating scales. Pickle passivated stainless steel has a matte appearance. Depending on the material, Apache's test have seen up to 25% improvement in RA values.


Electropolishing Electropolishing is an electro-chemical process that removes surface material from stainless steel. The process includes an immersion of the stainless steel component into a temperature controlled bath of electrolytes that are charged with a DC power supply. Electrolytes used in electropolishing

are concentrated sulfuric and phosphoric acid solutions. The finish has a mirror appearance. Apache's before and after tests have shown improvements in RA smoothness up to 50%; results vary depending on stainless material.


While surface standards such as 3-A, requires smooth, impervious material, free of cracks and crevices, food processors often choose the finish that not only meets those requirements but fits their cleaning processes, risk factors and overall business objectives.

Below is a study, conducted at Apache, that compares high-end finishes under 200X magnification. It shows the RA smoothness in four finish examples of 304 Stainless Steel. In the study, the electropolished finish is more than six times smoother in RA readings than the Bead Blasted finish. These findings are only significant to the processor if smoother finishes provide the benefit to cleaning and sanitation in their manufacturing processes.


SURFACE SMOOTHNESS TEST UNDER 200X MAGNIFICATION

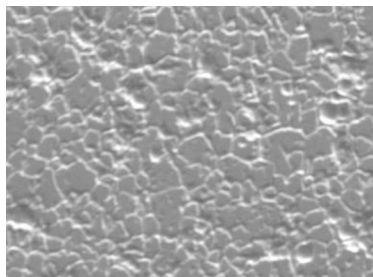


304 Stainless Steel 2B Finish
15 - 17 RA (12 gauge)

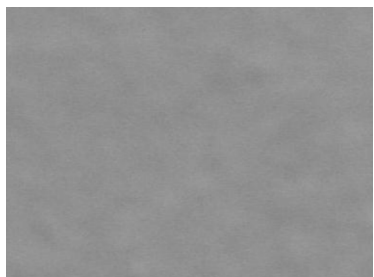

304 Stainless Steel
Electropolished Finish
5 - 6 RA

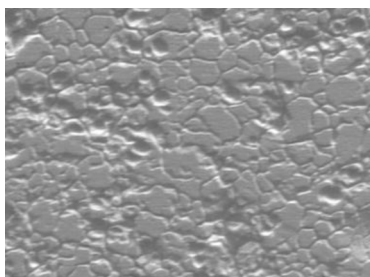

304 Stainless Steel 2B Finish
20 - 30 RA (10 gauge)

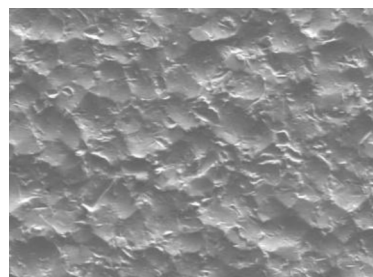

304 Stainless Steel Bead Blast
Finish 35 - 45 RA

FINISH DESIGNATION	
1-9 RA (1-10 RMS)	#8
4-13 RA (5-15 RMS) 2B	(16 Ga. Sheet)
9-18 RA (10 - 20 RMS)	2B (14 Ga. Sheet)
13 -22 RA (15-25 RMS)	2B (12 Ga. Sheet)
18-27 RA (20-30 RMS)	2B (11 Ga. Sheet)
18-31 RA (25-35 RMS)	2B (10 Ga. Sheet)
22-36 RA (25-40 RMS)	2B (7 Ga. Sheet)
10-16 RA (11-18 RMS)	#7 (320 Grit)
13-27 RA (15-30 RMS)	#6 (240 Grit)
18-31 RA (20-35 RMS)	#4 Dairy (180 Grit)
29-40 RA (32-45 RMS)	#4 (150 Grit)
36-58 RA (40-65 RMS)	#3 (120 Grit)
49-76 RA (55-85 RMS)	2D (80 Grit)

Note: The thinner the gauge material, the more rolling processes and cold reduction the material is subjected to, which creates a smoother surface.

STAINLESS STEEL GAUGE	
Gauge	Decimal Size
28	.015
26	.018
24	.024
22	.030
20	.036
18	.048
16	.060
14	.075
13	.090
12	.105
11	.120
10	.135
8	.165
7	.1874

Since stainless steel resists corrosion, maintains its strength at high temperatures, and is easily maintained. It is widely used in items such as industrial and food processing products, as well as medical and health equipment. The most common US grades of stainless steel are:

TYPE 304 / 304L

The most commonly specified austenitic (chromium-nickel stainless class) stainless steel, accounting for more than half of the stainless steel produced in the world. This grade withstands ordinary corrosion in architecture, is durable in typical food processing environments, and resists most chemicals. Type 304 is available in virtually all product forms and finishes.

TYPE 316 / 316L

Austenitic (chromium-nickel stainless class) stainless steel containing 2%-3% molybdenum (whereas 304 has none). The inclusion of molybdenum gives 316 greater resistance to various forms of deterioration.



Mepaco's food processing customers have discretion in choosing equipment finishes, even in food contact environments. The type of food product, bacterial count, manufacturing function and sanitation procedures all have an impact on the solution requirements as well as the selection of equipment finishes.

When weighing the advantages of food contact equipment finishes, the U.S. Dept. of Agriculture and Research Service offers a study conducted by the American Society of Mechanical Engineers on electropolishing and surface finishes. In the research, samples of stainless steel finishes were exposed to bacteria to allow growth. As microorganisms became attached to surfaces, they became more resistant to both physical and chemical sanitation practices. It was determined that out of eleven different finishes tested, the electropolished finish was the most resistant surface to bacterial attachment.

References:

The Fabricator, A publication of the Fabricators & Manufacturers Association, Intl.

ISSF, International Stainless Steel Forum

ASTM, International Standards Worldwide

USDA Agricultural Research Service

3-A, Basics of Sanitary Design

Apache and Mepaco® industry experts and reference documents



About Apache

The Apache Stainless Equipment Corporation employs experts and artisans in the fabrication of stainless equipment for a range of industries. Apache's tanks and vessels and Mepaco's food processing equipment showcase our expertise in high-end stainless finishes used in the beverage, biotechnology, pharmaceutical, and food processing industries.

Passivation, pickle passivation and electropolishing processes are offered in-house by experienced technicians; there is no dependency on outsourcing. Apache provides finishing services on tanks, vessels and food processing equipment as well as contract finishing requests.

Apache consists of four product families: Large ASME tanks, Small/Portable vessels, Contract Manufacturing and Mepaco®. With modifiable options, Mepaco's product line includes: thermal processing equipment, mixers, blenders, augers, dumpers, sanitary conveyors and material handling systems.

As a 100% employee owned company, Apache's culture exemplifies continuous improvement, efficiency, innovation and commitment to our customer.



PART OF THE APACHE STAINLESS EQUIPMENT CORP. FAMILY
200 W. Industrial Drive | Beaver Dam, WI 53916 USA
920-356-9900
www.mepaco.net



OSHA

PIP (Process Industry Standards)

ASME & API-650



SPECIALISTS IN: GRINDING & BLENDING | PUMPING & STUFFING | THERMAL PROCESSING | MATERIAL HANDLING | SYSTEM INTEGRATION